

4

3


2

1


THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION .19 .

© COPYRIGHT 19 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
DY	-	0		NPR FP00-0257-03	26NOV03	LWY	TAP

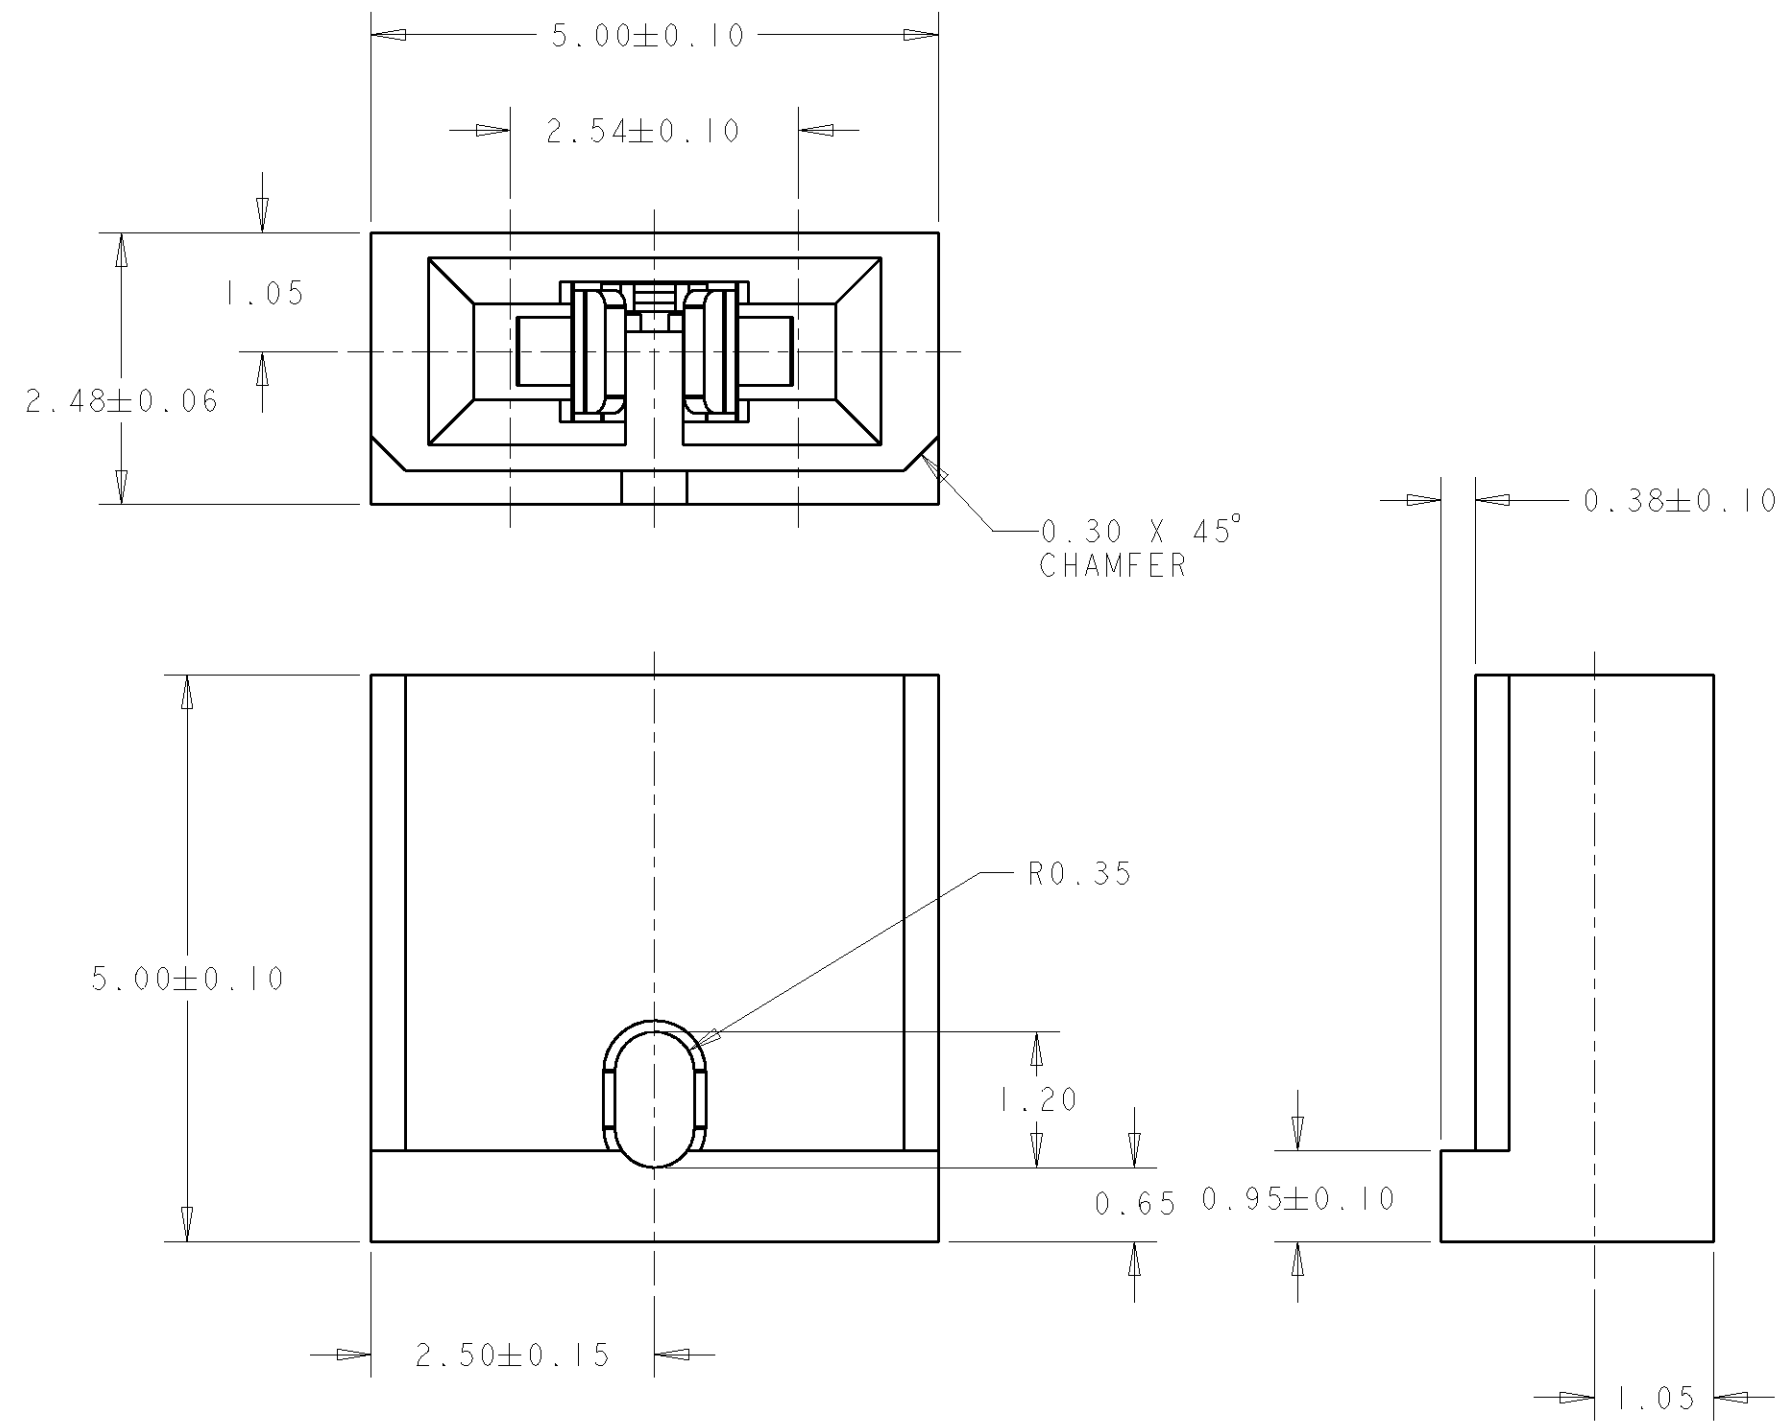

- NOTES:
- MATERIAL:
HOUSING: GLASS FILLED PBT, UL 94V-0, BLACK
CONTACT: PHOSPHOR BRONZE, GOLD FLASH 0.03um
MIN OVER 1.27um MIN NICKEL
 - DURABILITY: 50 CYCLES
 - TEMPERATURE RANGE: -55° C TO +125° C
 - CURRENT RATING: 3A AC MAX
 - INSULATION RESISTANCE: 1000MΩ MIN
 - DIRELECTRIC STRENGTH: 1000V AC PEAK-TO-PEAK FOR 1 MINUTE AT SEA LEVEL
 - CAPACITANCE: 1.5pF MAX
 - INSERTION FORCE: 2.68lbs (1.22kg) MAX
 - REMOVAL FORCE: 0.33lbs (0.15kg) MIN
 - CONTACT POINT FROM FRONT OF HOUSING: 3.95 MAX

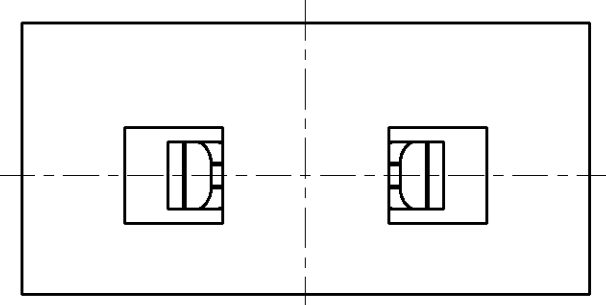

THIS DRAWING IS A CONTROLLED DOCUMENT FOR AMP INCORPORATED. IT IS SUBJECT TO CHANGE AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN WYLEE	26NOV03	tyco Electronics		Tyco Electronics Singapore Pte. Ltd.	
DIMENSIONS: mm		CHK AP TAY	APVD RICHARD TAN	NAME CONNECTOR, 2.54mm SHUNT, 2 POSITION			
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±- 1 PLC ±0.20 2 PLC ±0.15 3 PLC ±- 4 PLC ±- ANGLES ±1°		PRODUCT SPEC -	APPLICATION SPEC -	SIZE A3	CAGE CODE 00779	DRAWING NO C-84944	
MATERIAL I	FINISH I	WEIGHT -	CUSTOMER DRAWING	SCALE 15:1	SHEET 1	OF 1	REV 0