



1		2		3		4		5		6		7	
PLUG COMPONENT			PLUG STRIP DIMENSION			END STRIP DIMENSION			TERMINAL COMPONENT				
COLOR	DESCRIPTION	Q'ty	R.I.J	R.O.J	COLOR	R.O.J	R.I.J	COLOR	DESCRIPTION	TYPE			
40P BLACK	PVC Compound	1	6 <sup>+1</sup> <sub>-0</sub>	19 ± 1	BLACK(L)	15 <sup>+3</sup> <sub>-0</sub>		BLACK(L)					
Gray color	Assembly Body 111-003-001	1	6 <sup>+1</sup> <sub>-0</sub>	19 ± 1	WHITE(N)	15 <sup>+3</sup> <sub>-0</sub>		WHITE(N)					
			6 <sup>+1</sup> <sub>-0</sub>	19 ± 1	GREEN(E)	15 <sup>+3</sup> <sub>-0</sub>		GREEN(E)					
SVT 18AWGx3C						60°C Shielded Black							
Length 1500±50													



Plug type

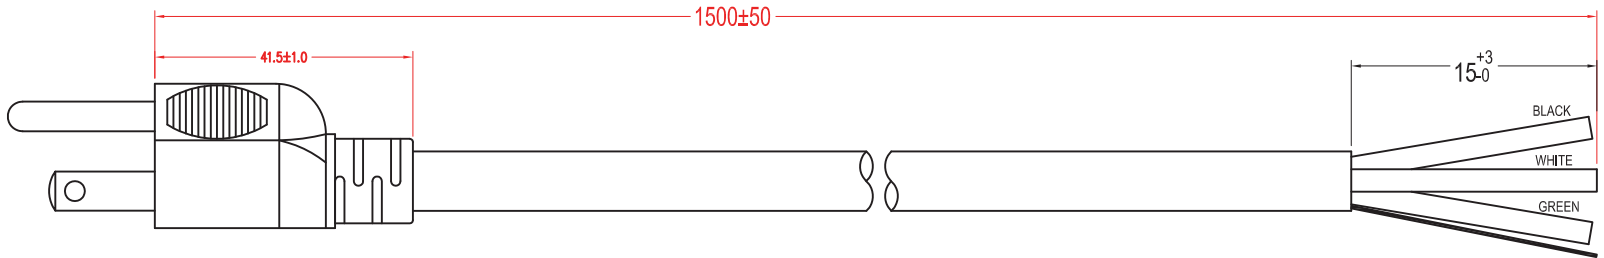


**Material:**


- SVT 3 x 18AWG(0.824mm<sup>2</sup>) VW-1 Shielded, 60°C 300V
- Jacket Color: Black
- E - Green; L - Black; N - White

**Electrical:**

- 100% Open & Short Testing
- Insulation Resistance: 100MΩ (min.)
- Voltage: 500V DC / 1 minute

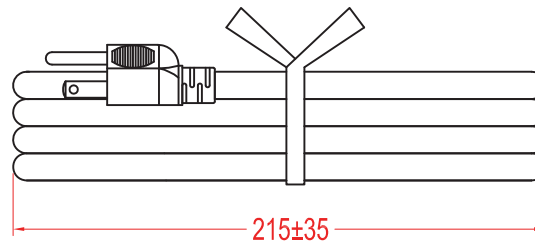

Hank Dimension

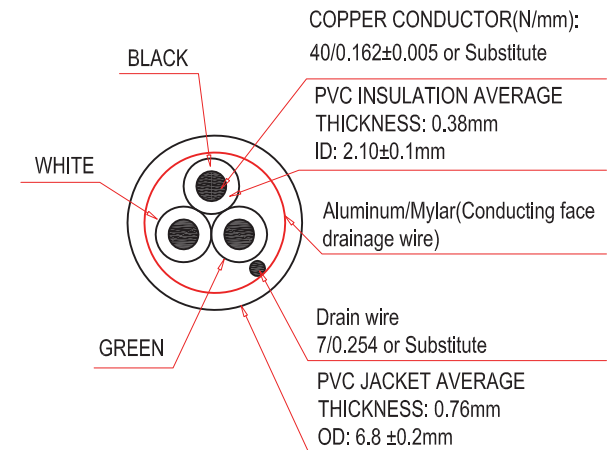

Wire Cross section

Unit: mm



Scale	Free					Date	Name	Title
TOLERANCE						Drawn	Wilson	Power cord - SVT
X.	±X					Approved	Groll	60°C 18AWG Open End, Shielded 1.5 Meters
X.X	±X							ASSMANN WSW-No.
X.XX	±X							AK500-OE-5-1.5
DIM	TOL							Drawing-No.
X.°	±X°							rev00
X.X°	±X°							Sheet
Angle	TOL	Id.	Modification	Date	Name			1/1



1		2		3		4		5		6		7	
---	--	---	--	---	--	---	--	---	--	---	--	---	--