

1

2


3

4


5

6

7




Gasket




Nut


with Liquid Glue

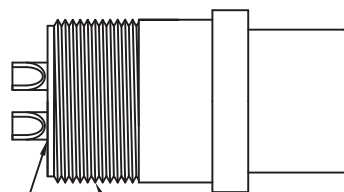


Connector



O-Ring

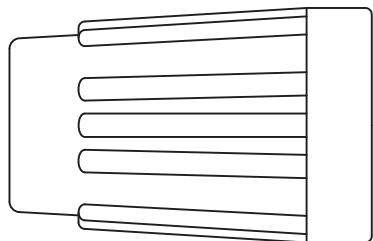




Sealing Nut



Clamp Ring



Gasket

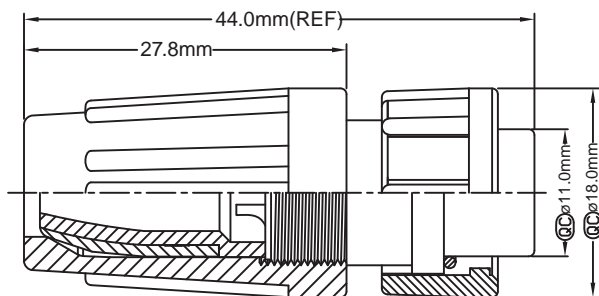Pin Assignments
Front View**Material:**

- Waterproof Rate: IP66
- Connector: Black, Nylon+GF
- Pin: Copper Alloy, Gold Plated
- Seals B1 for cable OD: $\varnothing 4.5\text{MM} \sim \varnothing 6.5\text{MM}$
- Seals B2 for cable OD: $\varnothing 3.5\text{MM} \sim \varnothing 5.3\text{MM}$
- One set unassembled in one(1) PE bag

Quality Control: Important Dimension to check

Scale	1:1						Date	Name	Title	
TOLERANCE							Drawn	06.03.14	Wilson	Waterproof Circular connector 5A Assembly type, Female, 4 pin
X.X	± 0.40						Approved	06.03.14	Groll	ASSMANN WSW-No.
X.XX	± 0.25									A-CR-04BFFA-L180-WP
X.XXX	± 0.15									Drawing-No.
DIM	TOL								ASS 6238 CO	rev00
X.°	$\pm 3^\circ$					Replace			Sheet	
X.X°	$\pm X^\circ$								1/1	
Angle	TOL	Id.	Modification	Date	Name	1840 W. Drake Drive, Suite 101 • Tempe, AZ 85283 Toll Free: 1-877-277-6266 • Email: info@assmann.us				

Unit: mm



1

2

3

4

5

6

7