



# INTERCONNECTS


## SERIES 350, 450, 801, 803 • 2,54 GRID (0,64 DIA. PINS), LOW PROFILE HEADERS & VERSATILE SOCKETS • SINGLE & DOUBLE ROW STRIPS

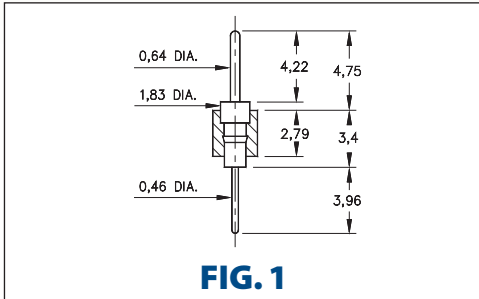


**FIG. 1**

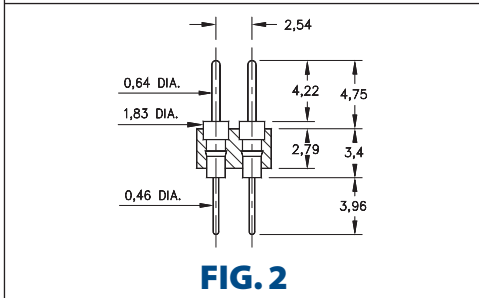


**FIG. 2**

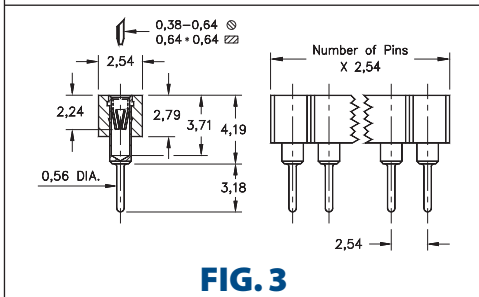

**FIG. 3**

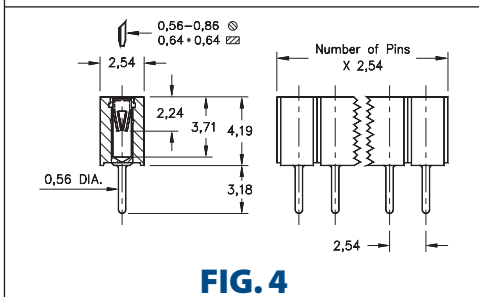


**FIG. 4**

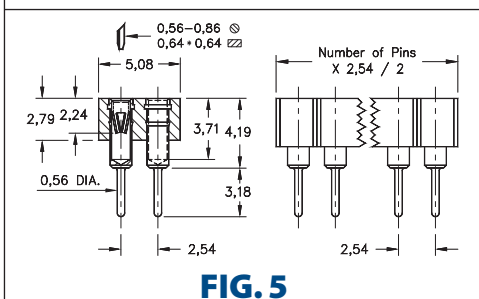

**FIG. 5**

- Series 350 and 450 single and double row pin headers use MM #0290 pins. See page 215 for details
- Series 801 and 803 single and double row low profile sockets use MM #1303 receptacles. See page 180 for details
- Series 801 and 803 receptacles use Hi-Rel, 6-finger BeCu #16 contact rated at 4.5 amps. Receptacles accept 0,64 diameter and 0,64 square pins. See page 256 for details
- Insulators are high temperature thermoplastic, suitable for all soldering operations

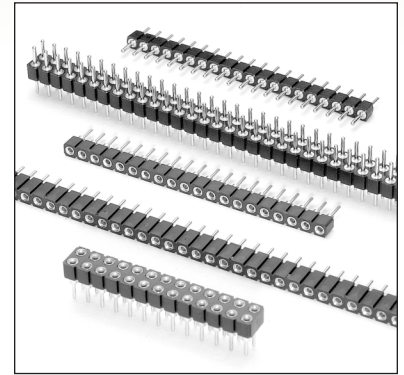

### ORDERING INFORMATION

<b>FIG. 1</b>	<b>Series 350...001</b>	<b>Single Row 0,64 Pin / 0,46 Solder Tail</b>		
		350-XX-1	-00-001000	
		Specify number of pins	01-64	
<b>FIG. 2</b>	<b>Series 450...001</b>	<b>Double Row 0,64 Pin / 0,46 Solder Tail</b>		
		450-XX-2	-00-001000	
		Specify number of pins	04-64	
		<b>XX=Plating Code</b> See Below		<i>For Electrical, Mechanical &amp; Environmental Data, See page 264</i>
<b>SPECIFY PLATING CODE XX=</b>		10	90	40
Pin Plating		0,25µm Au	5,08µm Sn/Pb	5,08µm Sn
<b>FIG. 3</b>	<b>Series 801...003</b>	<b>Low Profile Socket (short insulator)</b>		
		801-XX-0	-10-003000	
		Specify number of pins	01-64	
<b>FIG. 4</b>	<b>Series 801...013</b>	<b>Low Profile Socket (long insulator)</b>		
		801-XX-0	-10-013000	
		Specify number of pins	01-36	
<b>FIG. 5</b>	<b>Series 803...003</b>	<b>Double Row Low Profile Socket</b>		
		803-XX-0	-10-003000	
		Specify number of pins	04-72	
		<b>XX=Plating Code</b> See Below		<i>For Electrical, Mechanical &amp; Environmental Data, See page 264</i>
<b>SPECIFY PLATING CODE XX=</b>			41	43
Sleeve (Pin)			5,08µm Sn	5,08µm Sn
Contact (Clip)			0,25µm Au	0,76µm Au