


REV.	DESCRIPTION/ECO NO.	DATE
RELEASED		5/30/08

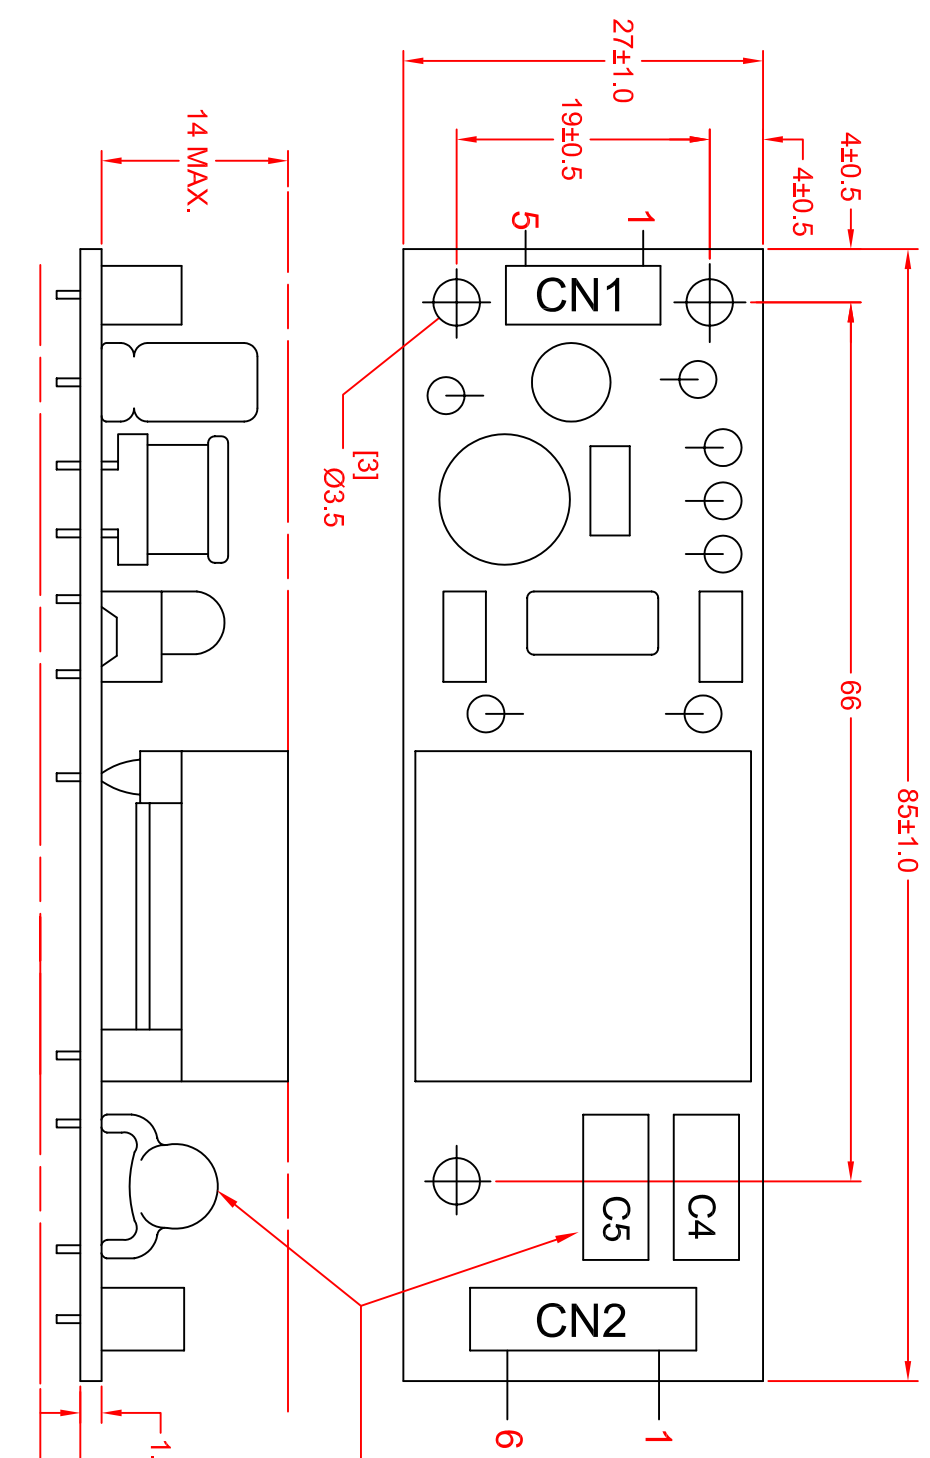

NOTE:
C4: 27PF, 3KV
C5: 27PF, 3KV

NO.	PIN NUMBER	JKL MATING WIRE HARNESS
CN1	1	BXC-10605
	2	
	3	
CN2	4	BXC-10992
	1	
	2	
	3	
	4	
5	OUT LAMP GND 1 & 2	

NOTE:
 MATING CONNECTORS ARE NOT INCLUDED WITH INVERTER. JKL WIRE HARNESS BXC-10605 AND BXC-10992 CAN BE ORDERED SEPARATELY.

OPERATING SPECIFICATIONS

CHARACTERISTICS	MIN	TYP	MAX
INPUT VOLTAGE: (Vdc)	10.8	12.0	13.2
INPUT CURRENT: (mA)	---	550	1000
OUTPUT VOLTAGE: (Vrms)	---	1500	---
OUTPUT CURRENT 2 X (mA)	4.5	5.0	---
OUTPUT FREQUENCY: (KHz)	20	30	40
DIMMING RANGE (OPTION)	10% REF.	---	100% REF.
OPERATING TEMP: (CELSIUS)	0	25	50

		METRIC DIMENSIONS ARE IN MILLIMETERS TOLERANCE UNLESS OTHERWISE SPECIFIED 1 PL +/- 0.3 2 PL +/- 0	
JKL COMPONENTS CORPORATION INVERTER WITH DIMMING OPTION	SCALE A	SIZE FSCM NO. 55335	DATE 5/30/08
DRAWN BY L. WENGSTROM	APP'D BY LARRY R.	DATE 5/30/08	SCALE NONE
TITLE INVERTER WITH DIMMING OPTION	REV. NO. 5/30/08	REVISION DATE 5/30/08	REV. NO. OF