




Balun 50Ω to 12.5Ω Balanced



Description

The 3A512 is a low profile balanced to unbalanced transformer designed for push-pull amplifiers in an easy to use surface mount package for Japanese PDC push-pull amplifier and mixer applications. These compact Xinger® surface mount baluns are ideal for high volume manufacturing and are more reliable and repeatable than traditional baluns. The 3A512 has an unbalanced port impedance of 50Ω and balanced port impedances of 12.5Ω to ground with a 25Ω balance between outputs. This eases the matching of the push-pull amplifier's power transistors, which have low impedance levels. The output ports have equal amplitude (-3dB) with 180 degree phase differential. The Xinger® balun is a result of years of research and development culminating with a solution so unique, a patent is pending on the design approach. The 3A512 is available on tape and reel for pick and place high volume manufacturing.

Features:

- 1.4 – 1.6 GHz
- 180° Transformer
- 50 Ohm to 2 x 12.5 + j3.5 Ohm
- Low Insertion Loss
- High Power
- Even Order Suppression
- Input to Output DC Isolation
- Surface Mountable
- Tape & Reel
- Convenient Package


ELECTRICAL SPECIFICATIONS***

Frequency	Unbalanced Port Impedance	Balanced Port Impedance*	Return Loss	Insertion Loss**
GHz	Ohms	Ohms	dB Min	dB max
1.4 – 1.6	50	12.5+j3.5	15	0.30
Amplitude Balance	Phase Balance	Power Handling	θJC	Operating Temp.
dB max	Degrees max	Watts	°C / Watt	°C
0.40	180± 5.0	250	5.8	-55 to +85


***Specification based on performance of unit properly installed on microstrip printed circuit boards with 50 Ω nominal impedance. Specifications subject to change without notice.

**Insertion loss specification excludes reflection loss. * 50Ω reference to ground


Outline Drawing

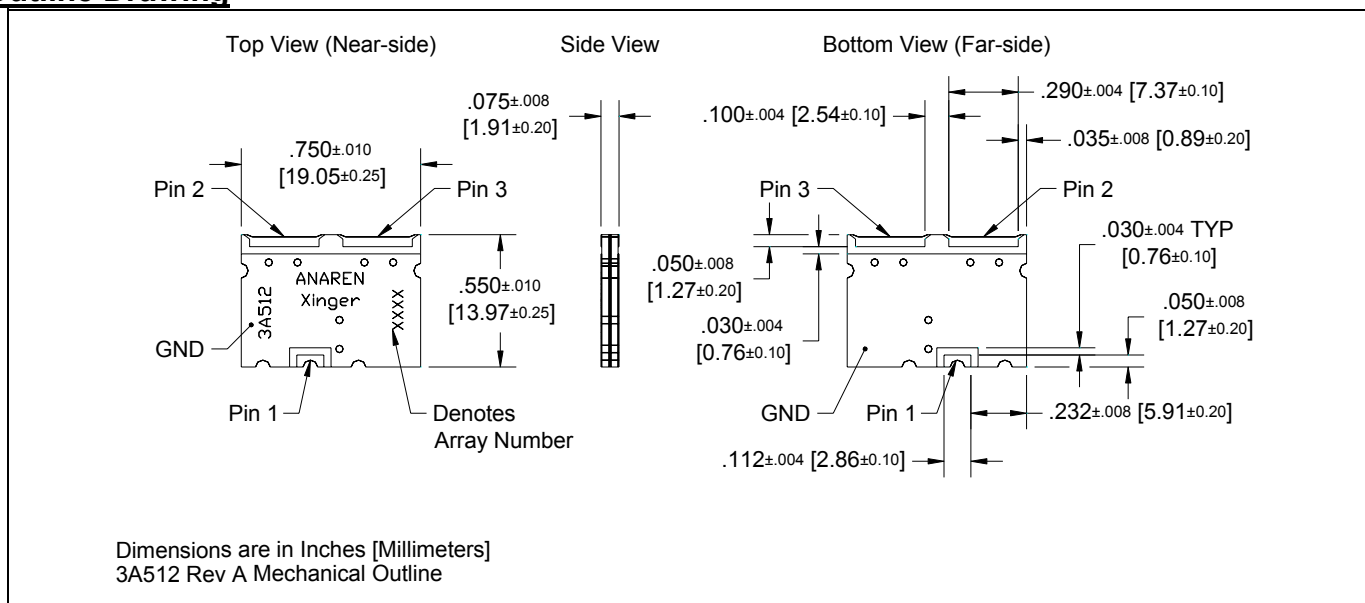

Typical Performance: 1200 MHz. to 1800 MHz.

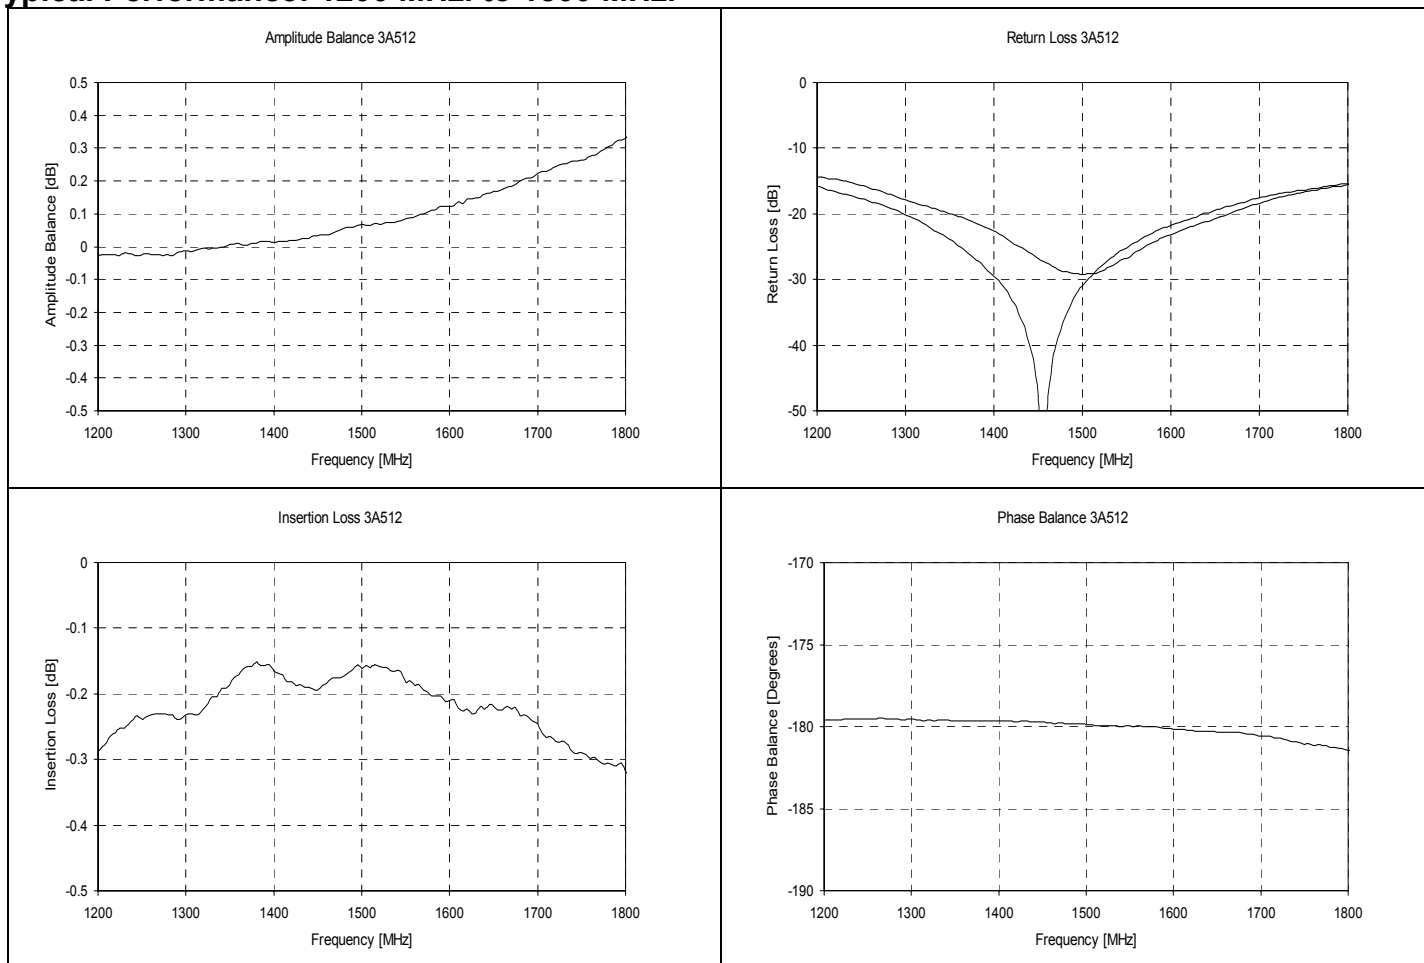


Pin Configuration:

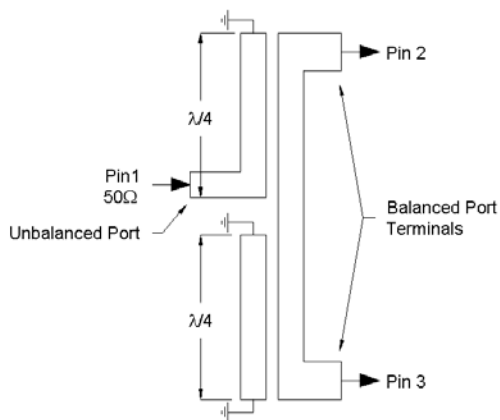

Mounting Configuration:

To ensure proper electrical and thermal performance there must be a ground plane with 100% solder connection underneath the part

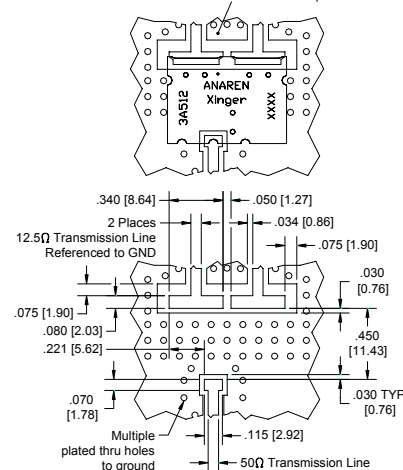

Dimensions are in Inches [Millimeters]
3A512 Rev A Mounting Footprint

USA/Canada: (315) 432-8909
Toll Free: (800) 544-2414
Europe: +44 2392-232392

Available on Tape and Reel For Pick and Place Manufacturing.

